

Datasheet

ABIFL-T120-2835-NW-24V-5M

Waterproof Compound Dripping LED
Flexible Strip



ABIFL-T120-2835-NW-24V-5M

Feature


- DC 24V
- 3.5mm x 2.8mm TOP LEDs.
- Total 600pcs LED, 5 meters long per roll.
- Flexible PC Board for easy installation.
- Waterproof Compound Dripping on the LED strip
- LED flexible strip with 600pcs 3.5mm x 2.8mm LED per roll (5 meter)
- Could be cut to 100 sections, 50mm with 6pcs TOP LEDs per section.

Note: Do unfold the flexible PC before turn on the LED.


ABIFL-T120-2835-NW-24V-5M

Outline Dimensions


Front view

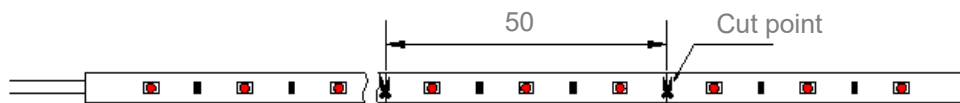

Cross section view



Side view

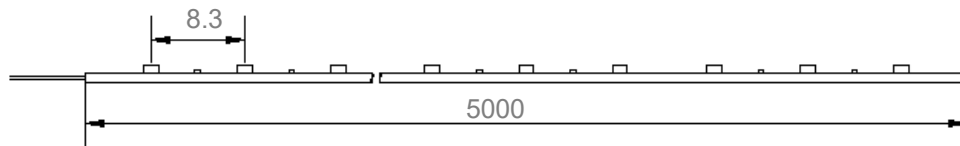

Unit: mm

ABIFL-T120-2835-NW-24V-5M

Specification

Item	ABIFL-T120-2835-NW-24V-5M	
Emitting Color	Neutral White	Unit
LED No.	120pcs LEDs /meter	-
Power Watts	6.5 W/meter	W
Input Voltage	DC 24 \pm 5%	V
LED Current	270mA/meter	mA
Luminous Flux	> 480 lm /meter	Lm
Color temperature	4000-4500	K
Beam Angle	120	Deg
Operating Temp.	-5~45	°C
Connector	2 pins VCC-GND	-
Dimension	5000mm x 10 mm, 600 LEDs/Roll	-